

CITIZEN

Micro HumanTech

Accessories

Interface Connections

Serial IF1-RS01	USB incl. USB hub IF1-HU01
Parallel IF1-PA01	Ethernet (SEH) IF1-ES01
USB IF1-UB01	Ethernet (Standard) IF1-ET01
Powered USB IF1-PU01	

Specifications

Printing method	Line thermal dot printing
Printing width	80mm/640 dots, 72mm/576 dots, 64mm/512 dots, 54.5mm/436 dots, 54mm/432 dots, 52.5mm/420 dots, 48mm/384 dots, 45mm/360 dots, 48.75mm/390 dots, 68.25mm/546 dots
Dot pitch	8 x 8 dots/mm (203 dpi)
Printing speed	Max. 300mm/s (print density 100%), 2400 dot-lines/s
Number of columns	83mm paper: Font A - 53, Font B - 71, Font C - 80, 80mm paper: Font A - 48, Font B - 64, Font C - 72, 60mm paper: Font A - 36, Font B - 48, Font C - 54, 58mm paper: Font A - 35, Font B - 46, Font C - 52
Character size (WxH)	Font A: 1.50 x 3.00mm (12 x 24 dots), Font B: 1.13 x 2.13mm (9 x 17 dots), Font C: 1.00 x 2.00mm (8 x 16 dots)
Character table	Alphanumeric, international, PC437/850/852/857/858/860/863/864/865/866/WPC1252/katakana/Thai code 18
Barcode type	UPC-A/E, JAN-13/8, Code 39, Code 128, CODABAR, Code 93, PDF417, QR Code
Logo registration/print	384 KB (capable of storing user-defined characters and logos)
Line spacing	4.23mm (1/6 inch), can be set by command
Paper	Width 83mm/80mm/60mm/58mm (all +0/-1mm) Diameter maximum 83mm Thickness 65-75µm (core tube diameter: inner 12mm/outer 18mm) 75-150µm (core tube diameter: inner 25.4mm/outer 32mm) Recommended Paper TF-50KS-E-2D from Nippon Paper, PD150R or PD160R from Ohji Paper, PA220AG, HP220A, HP220AB-1, F230AA, P220AB, or PB670 (2-color paper) from Mitsubishi Paper
Interface	Serial (RS-232C compliant), parallel (IEEE 1284 compliant), USB, USB with hub, Ethernet, powered USB
Input buffer	4K bytes/45 bytes
Drawer kick-out	2 drawers
External device port	RJ-45, 8-pin connector
Liquid crystal display (LCD)	128 x 32 dots STN liquid crystal, white/red LED backlight
Power supply	Input: AC 100 to 240V, 50/60 Hz, 150 VA, Output: DC 24, 2.1 A
Weight	CT-S801S: Approx. 2 kg, CT-S801A: Approx. 1.6 kg
Dimensions (W x D x H)	CT-S801S: 145 x 192 x 148 mm, CT-S801A: 145 (W) x 192 (D) x 120 (H) mm
Operating environment	5 to 45°C, 10 to 90% RH (no condensation)
Storage environment	-20 to 60°C, 10 to 90% RH (no condensation)
Reliability	Print head life: 150km, 200 million pulses (at normal temperature and humidity using recommended paper), Auto cutter life: 2 million cuts (at normal temperature/humidity, using recommended paper and paper thickness)
EMC and safety standards	UL, C-UL, FCC Class A, TUV-Bauart, CE Marking

Type Classification

CT-S801S 3 RS E BK P L M1
1) 2) 3) 4) 5) 6) 7) 8) 9)

1) **Model type**
CT-S801

2) **Power supply**
DC: No power source
S: Built-in power supply type
A: AC adapter type

3) **Paper width**
3: 3 inch (80/83 mm)
2: 2 inch (58/60 mm)

4) **Interface**
PA: Parallel
RS: Serial RS-232C
UB: USB only
UH: USB with hub
ET: Ethernet (standard type)
ES: Ethernet (multi-function type)
UP: Powered USB

5) **Market:**
J: Japanese
E: Europe/Asia
U: North America
C: China

6) **Body case color**
WH: White
BK: Black
GR: Gray

7) **PNE sensor**
No
P: PNE sensor



8) **Label**
No
L: Label type

9) **Black Mark sensor**
No
M1: Left side
M2: Right side



Exchangeable interfaces plus RJ-45 port

Customization Software

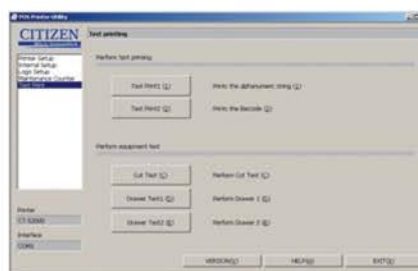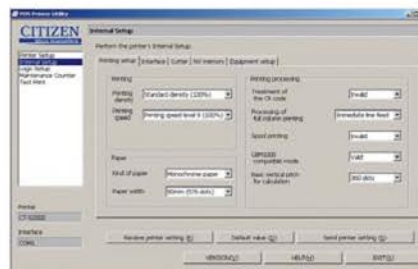

Features



- 300mm / sec high-speed printing
- 82,5/80/60/58 mm selectable paper width
- Easy paper loading
- Auto retracting Cutter (full/partial)
- Snap-in cutter
- LCD display
- Built-in buzzer
- Top paper exit
- Paper roll capacity Ø 83mm
- Exchangeable interface cards
- RJ-45 port
- Built-in AC adaptor
- Cash drawer kick-out
- Bitmap registration (NV memory)
- Barcode printing
- ESC/POS compatibility
- Page mode
- Two color printing
- Smoothing fonts
- Available in white, black or dark grey (option)
- Driver: Win2000/XP/Vista/2003 Server, OPOS, Java POS, CUPS
- Utility software: Printer customization software, Receipt Layout Designer